

## MORTAR FINITE ELEMENTS FOR COUPLING COMPRESSIBLE AND NEARLY INCOMPRESSIBLE MATERIALS IN ELASTICITY

BISHNU P. LAMICHHANE

**Abstract.** We consider the coupling of compressible and nearly incompressible materials within the framework of mortar methods. Taking into account the locking effect, we use a suitable discretization for the nearly incompressible material and work with a standard conforming discretization elsewhere. The coupling of different discretization schemes in different subdomains are handled by flexible mortar techniques. A priori error analysis is carried out for the coupled problem, and several numerical examples are presented. Using dual Lagrange multipliers, the Lagrange multipliers can easily be eliminated by local static condensation.

**Key Words.** Mortar finite elements, Lagrange multipliers, dual space, non-matching triangulations, mixed formulations, saddle point problems

### 1. Introduction

Often coupled problems with completely different material properties in different subdomains occur in solid mechanics. To get optimal a priori estimates, a proper discretization scheme should be used in each subdomain. Here, we consider coupling of compressible and nearly incompressible linear elastic materials with mortar techniques. The boundary value problem of elasticity involves a critical Lamé parameter  $\lambda$ . For nearly incompressible materials the Lamé parameter  $\lambda$  is very large, and it is well-known that working with low order finite elements with displacement based formulation suffers from so-called locking effect yielding a poor convergence, see [13, 18, 4]. Various approaches have been proposed to overcome this difficulty. Among these are to apply higher-order finite elements with a standard displacement formulation. For example, in [31], it is shown that working with the  $h$ -version finite elements of order higher than three on a class of triangular meshes completely avoid locking. On the other hand, in [4], it has been shown that the  $h$ -version can never be fully free of locking in rectangular meshes no matter how higher-order finite elements are used in the sense that optimal orders of convergence are not obtained. The other approach is related to working with mixed methods. The linear elasticity problem can be formulated as a mixed formulation in many different ways, see [18, 13, 11, 33, 3, 1]. The general approach in these mixed formulations is to introduce extra variables leading to a problem of saddle point type with a penalty term. The essential point is to prove that the method is robust for the limiting problem, which is the Stokes problem. Methods associated with nonconforming finite elements have also been analyzed leading to the uniform convergence in the nearly

---

Received by the editors February 11, 2008 and, in revised form, October 29, 2008.  
2000 *Mathematics Subject Classification.* 65N30, 65N55, 74B10.

incompressible case, see [21, 17, 30, 15]. The central point in these approaches is to construct an interpolation operator at each element which preserves zero divergence. We point out that many different methods like the reduced integration, the enhanced assumed strain and the mixed enhanced strain can be analyzed within the framework of mixed formulation, see [18, 12, 14, 32, 26, 27, 29]. All these approaches have in common that the finite element approximation is robust for nearly incompressible materials.

In order to avoid the problem of locking-effect, we consider suitable discretization schemes for nearly incompressible materials. Introducing the pressure as an additional unknown for the nearly incompressible case, we arrive at the problem of coupling a saddle point problem with a positive definite one. Working exclusively with non-matching triangulations, we use mortar techniques to realize the coupling of different discretization schemes.

This paper is organized as follows. In the next section, we describe the boundary value problem of linear elasticity and introduce a new formulation of the boundary value problem in the continuous setting suitable for coupling a nearly incompressible material with a compressible material. In Section 3, we show the stability of the scheme and prove optimal a priori estimates. Finally in Section 4, we present some numerical results illustrating the performance of our approach.

## 2. The problem of linear elasticity in the mortar framework

We consider a bounded polygonal or polyhedral domain  $\Omega \subset \mathbb{R}^d$ ,  $d \in \{2, 3\}$ , which is decomposed into two non-overlapping subdomains  $\Omega_1$  and  $\Omega_2$  with the common interior interface  $\Gamma$ ,  $\bar{\Gamma} = \partial\Omega_1 \cap \partial\Omega_2$ . For simplicity, we restrict ourselves to the case of two subdomains. However, the approach can easily be generalized to more than two subdomains.

We assume that the subdomains  $\Omega_1$  and  $\Omega_2$  are occupied with different isotropic linear elastic materials. Furthermore, the material in  $\Omega_1$  is supposed to be nearly incompressible, whereas  $\Omega_2$  is occupied with a compressible material. We consider the following linear elasticity problem of finding the displacement field  $\mathbf{u}$  in  $\Omega$  such that

$$(1) \quad \begin{aligned} -\operatorname{div}(\mathcal{C}_1 \boldsymbol{\varepsilon}(\mathbf{u})) &= \mathbf{f}_1 && \text{in } \Omega_1, \\ -\operatorname{div}(\mathcal{C}_2 \boldsymbol{\varepsilon}(\mathbf{u})) &= \mathbf{f}_2 && \text{in } \Omega_2 \end{aligned}$$

with homogeneous Dirichlet boundary conditions on  $\partial\Omega$ . Here,  $\mathcal{C}_1$  and  $\mathcal{C}_2$  are constant and symmetric fourth-order elasticity tensors corresponding to different materials in  $\Omega_1$  and  $\Omega_2$ , respectively. Denoting the identity tensor by  $\mathbf{1}$ , their actions on the strain tensor are defined as

$$\mathcal{C}_1 \boldsymbol{\varepsilon}(\mathbf{u}) = \lambda_1(\operatorname{div} \mathbf{u})\mathbf{1} + 2\mu_1 \boldsymbol{\varepsilon}(\mathbf{u}), \text{ and } \mathcal{C}_2 \boldsymbol{\varepsilon}(\mathbf{u}) = \lambda_2(\operatorname{div} \mathbf{u})\mathbf{1} + 2\mu_2 \boldsymbol{\varepsilon}(\mathbf{u}).$$

Moreover, the plane strain is assumed in the two-dimensional case. We define the global Hooke tensor  $\mathcal{C}$  which takes the value  $\mathcal{C}_1$  on  $\Omega_1$  and  $\mathcal{C}_2$  on  $\Omega_2$ , and set  $\mathbf{u}_1 := \mathbf{u}|_{\Omega_1}$  and  $\mathbf{u}_2 := \mathbf{u}|_{\Omega_2}$ . We assume that  $\mathbf{f}_i \in (L^2(\Omega_i))^d$ ,  $i = 1, 2$ . The interface conditions on  $\Gamma$  are given by

$$(2) \quad \begin{aligned} [\mathbf{u}] &:= \mathbf{u}_1 - \mathbf{u}_2 = 0 && \text{on } \Gamma, \\ [\mathbf{u}]_n &:= (\mathcal{C}_1 \boldsymbol{\varepsilon}(\mathbf{u}_1))\mathbf{n} - (\mathcal{C}_2 \boldsymbol{\varepsilon}(\mathbf{u}_2))\mathbf{n} = 0 && \text{on } \Gamma, \end{aligned}$$

where  $\mathbf{n}$  is the outer normal to  $\Gamma$  from  $\Omega_1$ .

In order to write the variational formulation of the linear elasticity problem (1), we introduce  $\mathbf{H}^1(\Omega_k) := (H^1(\Omega_k))^d$  for  $k = 1, 2$  and define the unconstrained product space

$$\mathbf{X} := \prod_{k=1}^2 \{ \mathbf{v} \in \mathbf{H}^1(\Omega_k) \mid \mathbf{v}|_{\partial\Omega \cap \partial\Omega_k} = 0 \}.$$

The interpolation space  $\mathbf{H}_{00}^{1/2}(\Gamma)$  is defined by  $\mathbf{H}_{00}^{1/2}(\Gamma) := (H_{00}^{1/2}(\Gamma))^d$ , and its dual space will be denoted by  $\mathbf{H}^{-1/2}(\Gamma)$ . The weak matching condition on the interface is imposed by introducing the vector-valued Lagrange multiplier space  $\mathbf{M} := \mathbf{H}^{-1/2}(\Gamma)$  on the interface  $\Gamma$ . Here, we consider the positive definite variational problem on the constrained finite element space which is given by means of the global Lagrange multiplier space  $\mathbf{M}$

$$(3) \quad \mathbf{V} := \{ \mathbf{v} \in \mathbf{X} \mid \int_{\Gamma} [\mathbf{v}] \cdot \boldsymbol{\psi} \, d\boldsymbol{\sigma} = 0, \boldsymbol{\psi} \in \mathbf{M} \}.$$

Then, the variational problem of linear elasticity in the mortar formulation can be written as: given  $l \in (L^2(\Omega))^d$  find  $\mathbf{u} \in \mathbf{V}$  such that

$$(4) \quad a(\mathbf{u}, \mathbf{v}) = l(\mathbf{v}), \quad \mathbf{v} \in \mathbf{V},$$

where the bilinear form  $a(\cdot, \cdot)$  and the linear form  $l(\cdot)$  are defined by

$$\begin{aligned} a(\mathbf{u}, \mathbf{v}) &:= \int_{\Omega_1} \mathcal{C}_1 \boldsymbol{\varepsilon}(\mathbf{u}) : \boldsymbol{\varepsilon}(\mathbf{v}) \, dx + \int_{\Omega_2} \mathcal{C}_2 \boldsymbol{\varepsilon}(\mathbf{u}) : \boldsymbol{\varepsilon}(\mathbf{v}) \, dx, \quad \text{and} \\ l(\mathbf{v}) &:= \int_{\Omega_1} \mathbf{f}_1 \cdot \mathbf{v} \, dx + \int_{\Omega_2} \mathbf{f}_2 \cdot \mathbf{v} \, dx, \end{aligned}$$

respectively. Taking into account the definition of  $\mathcal{C}\boldsymbol{\varepsilon}(\mathbf{u})$ , we can write the variational formulation (4) as

$$(5) \quad \sum_{i=1}^2 2\mu_i \int_{\Omega_i} \boldsymbol{\varepsilon}(\mathbf{u}) : \boldsymbol{\varepsilon}(\mathbf{v}) \, dx + \lambda_i \int_{\Omega_i} \operatorname{div} \mathbf{u} \operatorname{div} \mathbf{v} \, dx = \sum_{i=1}^2 \int_{\Omega_i} \mathbf{f}_i \cdot \mathbf{v} \, dx.$$

From the assumption on  $\mathcal{C}$ , we find that  $a(\cdot, \cdot)$  is symmetric, continuous and  $\mathbf{V}$ -elliptic, and hence the problem (5) has a unique solution  $\mathbf{u} \in \mathbf{V}$ . Since the material occupying  $\Omega_1$  is supposed to be nearly incompressible  $\lambda_1$  is very large, and hence the divergence of the exact solution  $\operatorname{div} \mathbf{u}_1$  is very small. This constraint for the low order approximation based on displacement approach leads to the locking. In the next paragraph, we will relax this constraint by introducing an additional variable for the pressure.

There are many efficient numerical approaches to handle a nearly incompressible material, see [32, 18, 11, 29]. In general, they are more complex than the standard displacement formulation. Our goal is to combine the standard formulation with a suitable scheme for a nearly incompressible material without losing the simplicity and optimality of the approach. For that purpose, we want to get a variational formulation which is uniformly well-posed in terms of  $\lambda_1$ . Now we introduce an additional unknown variable  $p := \lambda_1 \operatorname{div} \mathbf{u}$  in  $\Omega_1$  leading to a mixed formulation. Then the variational problem (5) is given by: find  $(\mathbf{u}, p) \in \mathbf{V} \times L^2(\Omega_1)$  such that

$$(6) \quad \begin{aligned} \tilde{a}(\mathbf{u}, \mathbf{v}) + \tilde{b}(\mathbf{v}, p) &= l(\mathbf{v}), & \mathbf{v} &\in \mathbf{V}, \\ \tilde{b}(\mathbf{u}, q) - \frac{1}{\lambda_1} \tilde{c}(p, q) &= 0, & q &\in L^2(\Omega_1), \end{aligned}$$

where

$$\begin{aligned}\tilde{a}(\mathbf{u}, \mathbf{v}) &:= \sum_{i=1}^2 2\mu_i \int_{\Omega_i} \boldsymbol{\varepsilon}(\mathbf{u}) : \boldsymbol{\varepsilon}(\mathbf{v}) \, dx + \lambda_2 \int_{\Omega_2} \operatorname{div} \mathbf{u} \operatorname{div} \mathbf{v} \, dx, \\ \tilde{b}(\mathbf{v}, q) &:= \int_{\Omega_1} \operatorname{div} \mathbf{v} q \, dx \quad \text{and} \quad \tilde{c}(p, q) := \int_{\Omega_1} p q \, dx.\end{aligned}$$

As usual, for  $v \in H^s(\Omega)$  ( $H^0(\Omega) \equiv L^2(\Omega)$ ),  $s \in \mathbb{R}$ ,  $\|v\|_{s,\Omega}$  denotes the standard norm in  $H^s(\Omega)$ , and we use the same notation for norms on  $\mathbf{H}^s(\Omega)$  and  $H^s(\Omega)$ , whereas a broken norm is used on  $\mathbf{X}$  defined as

$$\|\mathbf{v}\|_1 := \|\mathbf{v}\|_{1,\Omega_1} + \|\mathbf{v}\|_{1,\Omega_2}.$$

We remark that in contrast to the setting of the Stokes problem with homogeneous boundary condition, where  $p \in L_0^2(\Omega_1)$ , here, the pressure  $p \in L^2(\Omega_1)$ . The essential points for the existence and the uniqueness of the solution of a saddle point problem are ellipticity, continuity and a suitable inf-sup condition. Furthermore, for the saddle point problem with penalty, it is necessary that the bilinear form  $\tilde{c}(\cdot, \cdot)$  should be positive semi-definite and bounded, see [11]. The bilinear form  $\tilde{a}(\cdot, \cdot)$  is symmetric, continuous and  $\mathbf{V}$ -elliptic uniformly with respect to  $\lambda_1$ . It is also clear that the bilinear form  $\tilde{c}(\cdot, \cdot)$  is continuous, symmetric and positive definite. The continuity of  $\tilde{b}(\cdot, \cdot)$  follows from its definition.

**Lemma 1.** *The bilinear form  $\tilde{b}(\cdot, \cdot)$  on  $\mathbf{V} \times L^2(\Omega_1)$  satisfies an inf-sup condition uniformly with respect to  $\lambda_1$ .*

*Proof.* The proof is based on applying the argument due to Boland and Nicolaides [10]. Given  $q \in L^2(\Omega_1)$ , we split  $q = q_0 + q_c$ , where  $\int_{\Omega_1} q_0 \, dx = 0$  and  $q_c$  is a constant such that  $\int_{\Omega_1} q \, dx = \int_{\Omega_1} q_c \, dx = |\Omega_1| q_c$ . Thus  $\|q\|_{0,\Omega_1}^2 = \|q_0\|_{0,\Omega_1}^2 + \|q_c\|_{0,\Omega_1}^2$ . Since  $q_0 \in L_0^2(\Omega_1)$ , there exists a  $\mathbf{v}_0 \in \mathbf{H}_0^1(\Omega_1)$  with  $\|\mathbf{v}_0\|_{1,\Omega_1} \leq C\|q_0\|_{0,\Omega_1}$  such that

$$\|q_0\|_{0,\Omega_1}^2 = \tilde{b}(\mathbf{v}_0, q_0), \quad \text{see [23, Corollary 2.4].}$$

Hence  $\|q\|_{0,\Omega_1}^2 = \tilde{b}(\mathbf{v}_0, q_0) + q_c^2 |\Omega_1|$ . Now, we define a piecewise constant function  $\tilde{f}$  in  $\Omega$  with

$$\tilde{f}(x) := \begin{cases} q_c & \text{if } x \in \Omega_1, \\ -\frac{q_c |\Omega_1|}{|\Omega_2|} & \text{if } x \in \Omega_2 \end{cases}$$

so that  $\tilde{f} \in L_0^2(\Omega)$ , and hence the divergence equation

$$(7) \quad \nabla \cdot \mathbf{w} = \tilde{f} \quad \text{in } \Omega$$

has a solution  $\mathbf{v}_c \in \mathbf{H}_0^1(\Omega)$  with  $\|\mathbf{v}_c\|_1 \leq C\|\tilde{f}\|_0$ , see [2, 22]. Thus

$$\|q\|_{0,\Omega_1}^2 = \tilde{b}(\mathbf{v}_0, q_0) + q_c^2 |\Omega_1| = \tilde{b}(\mathbf{v}_0, q_0) + \int_{\Omega_1} \nabla \cdot \mathbf{v}_c q_c \, dx = \tilde{b}(\mathbf{v}_0, q_0) + \tilde{b}(\mathbf{v}_c, q_c).$$

Since  $\mathbf{v}_0 \in \mathbf{H}_0^1(\Omega_1)$ , we can extend  $\mathbf{v}_0$  trivially on  $\Omega$  by defining  $\tilde{\mathbf{v}}_0 := \mathbf{v}_0$  in  $\Omega_1$  and  $\tilde{\mathbf{v}}_0 := 0$  in  $\Omega_2$ , and find that  $\tilde{\mathbf{v}}_0 \in \mathbf{H}_0^1(\Omega)$ . Hence  $\tilde{b}(\mathbf{v}_0, q_0) = \tilde{b}(\tilde{\mathbf{v}}_0, q_0)$ . On the other hand,

$$\tilde{b}(\tilde{\mathbf{v}}_0 + \mathbf{v}_c, q_0 + q_c) = \tilde{b}(\tilde{\mathbf{v}}_0, q_0) + \tilde{b}(\mathbf{v}_c, q_c) + \tilde{b}(\tilde{\mathbf{v}}_0, q_c) + \tilde{b}(\mathbf{v}_c, q_0).$$

Noting that  $\tilde{b}(\tilde{\mathbf{v}}_0, q_c) = 0$ , and  $\tilde{b}(\mathbf{v}_c, q_0) = 0$ , we get

$$\|q\|_{0,\Omega_1}^2 = \tilde{b}(\tilde{\mathbf{v}}_0 + \mathbf{v}_c, q_0 + q_c).$$

Finally, taking into account that  $\tilde{\mathbf{v}}_0 \in \mathbf{H}_0^1(\Omega)$  we get  $\mathbf{v}_c + \tilde{\mathbf{v}}_0 =: \mathbf{v} \in \mathbf{H}_0^1(\Omega)$  with  $\|\mathbf{v}\|_1 \leq \|\mathbf{v}_c + \tilde{\mathbf{v}}_0\|_1 \leq C(\|\tilde{f}\|_0 + \|q_0\|_{0,\Omega_1})$ , which completes the proof.  $\square$

An immediate consequence of the previous lemma is the following theorem.

**Theorem 2.** *The problem 6 has a unique solution and there exists a constant  $C$  independent of  $\lambda_1$  such that*

$$\|\mathbf{u}\|_1 + \|p\|_{0,\Omega_1} \leq C\|l\|_0.$$

### 3. Mortar discretizations and a priori estimates

In this section, we briefly review mortar finite elements and prove optimal a priori estimates for the discretization errors. Let  $\mathcal{T}_1$  and  $\mathcal{T}_2$  be independent shape regular triangulations on  $\Omega_1$  and  $\Omega_2$  with mesh-sizes bounded by  $h_1$  and  $h_2$ , respectively. We define the unconstrained discrete finite element space for the displacement  $\mathbf{X}_h := \mathbf{X}_1 \times \mathbf{X}_2$ , where  $\mathbf{X}_k := X_k^d$ ,  $X_k$  being the conforming finite element space of order  $p_k > 1$  in  $\Omega_k$ . We recall that no interface condition is imposed on  $\mathbf{X}_h$ , and the elements in  $\mathbf{X}_h$  do not have to satisfy a continuity condition at the interface. The pressure space  $L^2(\Omega_1)$  is discretized by some finite elements and will be denoted by  $R_h \subset L^2(\Omega_1)$ . The efficiency and optimality of the mortar method depends on the choice of a discrete Lagrange multiplier space, which should satisfy assumptions stated in [28, Assumptions 2–4]. Without loss of generality, the Lagrange multiplier space is based on a “ $d - 1$ ”-dimensional mesh  $\mathcal{T}_{\Gamma_2}$  inherited from  $\mathcal{T}_2$ , and its basis functions are defined locally having the same support as finite element basis functions associated with the interior nodes of the slave side.

We observe that since the normal has jumps if  $\Gamma$  has corners although  $\mathbf{u} \in \mathbf{H}^{s+1}(\Omega_1)$ ,  $\boldsymbol{\varepsilon}(\mathbf{u})\mathbf{n}$  is, in general, not an element in  $\mathbf{H}^{s-1/2}(\Gamma)$  when  $s > \frac{1}{2}$ . Therefore, we decompose  $\Gamma$  into a finite number of subsets  $\gamma_i$ ,  $1 \leq i \leq N$ , such that each  $\gamma_i$  entirely lies in a “ $d - 1$ ”-dimensional hyperplane, and

$$\bar{\Gamma} = \bigcup_{i=1}^N \bar{\gamma}_i,$$

where  $\gamma_k \cap \gamma_l = \emptyset$ , and  $\bar{\gamma}_k \cup \bar{\gamma}_l$  does not entirely lie in a “ $d - 1$ ”-dimensional hyperplane,  $1 \leq k \neq l \leq N$ . Denoting the discrete Lagrange multiplier spaces on  $\gamma_i$  by  $M_i$ ,  $1 \leq i \leq N$ , we define  $\mathbf{M}_i := M_i^d$ , and our global discrete Lagrange multiplier space is then given as the product space

$$\mathbf{M}_h := \prod_{i=1}^N \mathbf{M}_i.$$

The finite element nodes in  $\partial\gamma_i$  on the slave side,  $1 \leq i \leq N$ , are the crosspoints and they do not carry any degree of freedom for the Lagrange multipliers. We assume that  $\mathbf{W}_i^m$  and  $\mathbf{W}_i^s$  are the trace spaces of  $\mathbf{X}_1$  and  $\mathbf{X}_2$  restricted to  $\gamma_i$ , respectively, satisfying homogeneous boundary conditions on  $\partial\gamma_i$ , and we set

$$\mathbf{W}_h^m := \prod_{i=1}^N \mathbf{W}_i^m, \quad \mathbf{W}_h^s := \prod_{i=1}^N \mathbf{W}_i^s.$$

As in the continuous setting, we consider the positive-definite variational problem on the constrained finite element space  $\mathbf{V}_h$  which is given by means of the discrete global Lagrange multiplier space  $\mathbf{M}_h$

$$(8) \quad \mathbf{V}_h := \{\mathbf{v}_h \in \mathbf{X}_h \mid b(\mathbf{v}_h, \boldsymbol{\psi}_h) = 0, \boldsymbol{\psi}_h \in \mathbf{M}_h\},$$

where  $b(\mathbf{v}_h, \boldsymbol{\psi}_h) := \sum_{i=1}^N \int_{\gamma_i} [\mathbf{v}_h] \cdot \boldsymbol{\psi}_h \, d\boldsymbol{\sigma}$ . We remark that the elements of the space  $\mathbf{V}_h$  satisfy a weak continuity condition on the skeleton  $\Gamma$  in terms of the discrete Lagrange multiplier space  $\mathbf{M}_h$ . However,  $\mathbf{V}_h$  is, in general, not a subspace of  $\mathbf{H}_0^1(\Omega)$ . Replacing the space  $\mathbf{V} \times L^2(\Omega_1)$  by our discrete space  $\mathbf{V}_h \times R_h$  in (6), we obtain our discrete variational problem: find  $(\mathbf{u}_h, p_h) \in \mathbf{V}_h \times R_h$  such that

$$(9) \quad \begin{aligned} \tilde{a}(\mathbf{u}_h, \mathbf{v}) + \tilde{b}(\mathbf{v}, p_h) &= l(\mathbf{v}), & \mathbf{v} \in \mathbf{V}_h, \\ \tilde{b}(\mathbf{u}_h, q) - \frac{1}{\lambda_1} \tilde{c}(p_h, q) &= 0, & q \in R_h. \end{aligned}$$

To establish a priori estimates for the discretization errors, we consider the saddle point formulation (9) of the elasticity problem and apply the theory of mixed finite elements. The continuity of the bilinear form  $\tilde{a}(\cdot, \cdot)$  on  $\mathbf{V}_h \times \mathbf{V}_h$ , of  $\tilde{b}(\cdot, \cdot)$  on  $\mathbf{V}_h \times R_h$  and of  $\tilde{c}(\cdot, \cdot)$  on  $R_h \times R_h$  is straightforward. Moreover, the continuity constants are independent of  $\lambda_1$ . Furthermore, we need the ellipticity of the bilinear form  $\tilde{a}(\cdot, \cdot)$  on  $\mathbf{V}_h \times \mathbf{V}_h$ , and a uniform inf-sup condition for the bilinear form  $\tilde{b}(\cdot, \cdot)$  on  $\mathbf{V}_h \times R_h$ .

**3.1. Uniform inf-sup condition and ellipticity.** The following two assumptions will be crucial to prove the inf-sup condition in the discrete setting and are supposed to hold in the following.

**Assumption 3.** 3(i) For a constant  $q_c \in \mathbb{R}$ , there exist functions  $\mathbf{v}_h^s \in \mathbf{W}_i^s, \mathbf{v}_h^m \in \mathbf{W}_i^m$  for some  $i \in \{1, \dots, N\}$  with  $\|\mathbf{v}_h^s\|_{\mathbf{H}_{00}^{1/2}(\gamma_i)} \leq C|q_c|, \|\mathbf{v}_h^m\|_{\mathbf{H}_{00}^{1/2}(\gamma_i)} \leq C|q_c|$  so that

$$\int_{\gamma_i} \mathbf{v}_h^s \cdot \mathbf{n} \, d\boldsymbol{\sigma} = q_c, \text{ and } \int_{\gamma_i} (\mathbf{v}_h^s - \mathbf{v}_h^m) \cdot \boldsymbol{\psi} \, d\boldsymbol{\sigma} = 0, \boldsymbol{\psi} \in \mathbf{M}_i.$$

3(ii) For any  $q \in R_h \cap L_0^2(\Omega_1)$ , there exists a constant  $C > 0$  independent of the meshsize such that

$$\sup_{\mathbf{v}_h \in \mathbf{X}_1 \cap \mathbf{H}_0^1(\Omega_1)} \frac{\tilde{b}(\mathbf{v}_h, q)}{\|\mathbf{v}_h\|_{1, \Omega_1}} \geq C\|q\|_{0, \Omega_1}.$$

Assumption 3 (i) is readily met if the triangulation is fine enough and the discrete Lagrange multiplier space satisfies the stability assumption [28, Assumption 2], and Assumption 3 (ii) tells that the spaces  $\mathbf{X}_1$  and  $R_h$  should be chosen carefully so that they form a stable pair for the Stokes problem. The following lemma provides a necessary tool to prove inf-sup condition.

**Lemma 4.** For a constant  $q_c \in \mathbb{R}$ , there exists a  $\mathbf{v}_h \in \mathbf{V}_h$  with  $\|\mathbf{v}_h\|_1 \leq C|q_c|$  such that  $\int_{\Omega_1} \nabla \cdot \mathbf{v}_h \, dx = q_c$ .

*Proof.* Because of Assumption 3 (i), we can choose a function  $\mathbf{v}_h^s \in \mathbf{W}_i^s$  with

$$\|\mathbf{v}_h^s\|_{\mathbf{H}_{00}^{1/2}(\gamma_i)} \leq C|q_c| \text{ such that } \int_{\gamma_i} \mathbf{v}_h^s \cdot \mathbf{n} \, d\boldsymbol{\sigma} = q_c,$$

and define a function  $\mathbf{v}_h^m \in \mathbf{W}_i^m$  with  $\|\mathbf{v}_h^m\|_{\mathbf{H}_{00}^{1/2}(\gamma_i)} \leq C|q_c|$  so that  $\int_{\gamma_i} (\mathbf{v}_h^s - \mathbf{v}_h^m) \cdot \boldsymbol{\psi} \, d\boldsymbol{\sigma} = 0, \boldsymbol{\psi} \in \mathbf{M}_i$ . Since  $\mathbf{v}_h^s, \mathbf{v}_h^m \in \mathbf{H}_{00}^{1/2}(\gamma_i)$  both  $\mathbf{v}_h^s$  and  $\mathbf{v}_h^m$  can trivially

be extended to functions in  $\mathbf{W}_h^s$  and  $\mathbf{W}_h^m$ , respectively, still denoted by  $\mathbf{v}_h^s$  and  $\mathbf{v}_h^m$ . Using the discrete harmonic extension, we obtain functions  $\mathbf{w}_h^m \in \mathbf{X}_1$  and  $\mathbf{w}_h^s \in \mathbf{X}_2$  so that  $\mathbf{w}_h^s|_\Gamma = \mathbf{v}_h^s$  and  $\mathbf{w}_h^m|_\Gamma = \mathbf{v}_h^m$ . Defining a function  $\mathbf{v}_h \in \mathbf{X}_h$  with  $\mathbf{v}_h|_{\Omega_1} = \mathbf{w}_h^m$ , and  $\mathbf{v}_h|_{\Omega_2} = \mathbf{w}_h^s$ , we find that  $\mathbf{v}_h \in \mathbf{V}_h$ , and from the well known property of harmonic extension we have  $\|\mathbf{v}_h\|_1 \leq C|q_c|$ . Finally, the result follows from

$$\int_{\Omega_1} \nabla \cdot \mathbf{v}_h \, dx = \int_{\Gamma} \mathbf{v}_h^s \cdot \mathbf{n} \, d\sigma = \int_{\gamma_i} \mathbf{v}_h^s \cdot \mathbf{n} \, d\sigma = q_c.$$

□

**Theorem 5.** *For any  $q_h \in R_h$ , there exists a constant  $C$  independent of  $\lambda_1$  and the meshsize such that*

$$\sup_{\mathbf{v}_h \in \mathbf{V}_h} \frac{\tilde{b}(\mathbf{v}_h, q_h)}{\|\mathbf{v}_h\|_1} \geq C \|q_h\|_{0, \Omega_1}.$$

*Proof.* As in the continuous case, we resort to the argument due to Boland and Nicolaides [10] to prove the inf-sup condition. We take  $q_h \in R_h$  and split  $q_h = q_{0h} + q_{ch}$ , where  $\int_{\Omega_1} q_{0h} \, dx = 0$  and  $q_{ch}$  is the  $L^2$ -projection of  $q_h$  onto  $\mathbb{R}$  such that  $\int_{\Omega_1} q_h \, dx = \int_{\Omega_1} q_{ch} \, dx$ . Since  $q_{0h} \in R_h \cap L_0^2(\Omega_1)$ , from Assumption 3 (ii), we get a  $\mathbf{v}_{0h} \in \mathbf{X}_1 \cap \mathbf{H}_0^1(\Omega_1)$  with  $\|\mathbf{v}_{0h}\|_{1, \Omega_1} \leq C \|q_{0h}\|_{0, \Omega_1}$  so that  $\|q_{0h}\|_{0, \Omega_1}^2 = \tilde{b}(\mathbf{v}_{0h}, q_{0h})$ . Hence

$$(10) \quad \|q_h\|_{0, \Omega_1}^2 = \tilde{b}(\mathbf{v}_{0h}, q_{0h}) + q_{ch}^2 |\Omega_1|.$$

From Lemma 4, we get a  $\mathbf{v}_{ch} \in \mathbf{V}_h$  such that  $\int_{\Omega_1} \nabla \cdot \mathbf{v}_{ch} \, q_{ch} \, dx = q_{ch}^2 |\Omega_1|$ . Using this in (10), we get

$$\|q_h\|_{0, \Omega_1}^2 = \tilde{b}(\mathbf{v}_{0h}, q_{0h}) + \tilde{b}(\mathbf{v}_{ch}, q_{ch})$$

The rest of the proof follows exactly as in continuous setting. □

**Remark 6.** *Working with bilinear or trilinear finite elements and piecewise constant pressure ( $Q_1 P_0$ ) in the subdomain with the nearly incompressible material, it is well known that the uniform inf-sup condition does not hold, and one can observe some spurious pressure modes. Since Assumption 3 (ii) does not hold, the theoretical analysis does not cover this case. However, as analyzed in [23] for a problem posed in a single domain with homogeneous Dirichlet boundary condition, the spurious pressure modes do not substantially affect the displacement. Furthermore, through the numerical results we will show that the  $Q_1 P_0$  formulation can be successfully used in a subdomain with nearly incompressible material.*

Now we turn our attention to the ellipticity of the bilinear form  $\tilde{a}(\cdot, \cdot)$  on the space  $\mathbf{V}_h$ . If  $\partial\Omega_k \cap \partial\Omega$  has a non-zero measure for  $k = 1, 2$ , we can apply Korn's and Poincaré's inequalities to each subdomain and obtain the desired results

$$\tilde{a}(\mathbf{v}, \mathbf{v}) = \sum_{k=1}^2 \tilde{a}_k(\mathbf{v}, \mathbf{v}) \geq C \sum_{k=1}^2 \|\mathbf{v}\|_{1, \Omega_k}^2 = C \|\mathbf{v}\|_1^2, \quad \mathbf{v} \in \mathbf{X}_h,$$

where  $\tilde{a}_k(\cdot, \cdot)$  stands for the restriction of  $\tilde{a}(\cdot, \cdot)$  to the subdomain  $\Omega_k$ . Thus  $\tilde{a}(\cdot, \cdot)$  is elliptic on  $\mathbf{X}_h \times \mathbf{X}_h$ . Unfortunately, there are many interesting situations where we cannot satisfy this assumption. However, it is sufficient to have ellipticity of  $\tilde{a}(\cdot, \cdot)$  in  $\mathbf{V}_h \times \mathbf{V}_h$  for the problem (9) to be uniquely solvable. Since the bilinear form  $\tilde{a}(\cdot, \cdot)$  does not involve  $\lambda_1$  the ellipticity can be shown exactly as in [34, 16, 24] uniformly

with respect to  $\lambda_1$ . It is shown in [16, 24] that the ellipticity constant is independent of the number and the size of different subdomains of the decomposition.

**Remark 7.** *Using the Stokes equation in the subdomain  $\Omega_1$  instead of equation of elasticity we arrive at the Stokes flow coupled with a linear elastic body. The coupled problem can be written as: given  $l \in L^2(\Omega)$  find  $(\mathbf{u}_h, p_h) \in \mathbf{V}_h \times R_h$  such that*

$$\begin{aligned} \int_{\Omega_2} \mathcal{C}_2 \boldsymbol{\varepsilon}(\mathbf{u}_h) : \boldsymbol{\varepsilon}(\mathbf{v}_h) dx + \mu_1 \int_{\Omega_1} \nabla \mathbf{u}_h : \nabla \mathbf{v}_h dx + \int_{\Omega_1} \operatorname{div} \mathbf{v}_h p_h dx &= l(\mathbf{v}_h), \mathbf{v}_h \in \mathbf{V}_h \\ \int_{\Omega_1} \operatorname{div} \mathbf{u}_h q_h dx &= 0, q_h \in R_h, \end{aligned}$$

where  $\mathbf{u}_h$  restricted to the subdomain  $\Omega_2$  represents the displacement,  $\mathbf{u}_h$  restricted to the subdomain  $\Omega_1$  represents the velocity, and  $\mu_1$  is the kinematic viscosity for the incompressible fluid. The mathematical analysis of mortar finite elements for the Stokes problem can be found in [6, 7]. The mortar finite element method for mixed elasticity problems is analyzed in [5].

**3.2. A priori estimates.** The immediate consequence of the above discussion is the well-posedness of the discrete problem (9). From the theory of saddle point problem, see, e.g., [18], we have

**Lemma 8.** *The discrete problem (9) has exactly one solution  $(\mathbf{u}_h, p_h) \in \mathbf{V}_h \times R_h$  which is uniformly stable with respect to the data  $\mathbf{f}_i, i = 1, 2$ , and there exists a constant  $C$  independent of Lamé parameter  $\lambda_1$  such that*

$$\|\mathbf{u}_h\|_1 + \|p_h\|_{0,\Omega_1} \leq C \|\mathbf{f}\|_0.$$

The convergence theory is provided by an abstract result about the approximation of saddle point problems by nonconforming methods, see [20, 6, 5].

**Lemma 9.** *Assume that  $(\mathbf{u}, p)$  and  $(\mathbf{u}_h, p_h)$  be the solutions of problems (6) and (9), respectively. Then, we have the following error estimate uniform with respect to  $\lambda_1$ :*

$$(11) \quad \|\mathbf{u} - \mathbf{u}_h\|_1 + \|p - p_h\|_{0,\Omega_1} \leq C \left( \inf_{\mathbf{v}_h \in \mathbf{V}_h} \|\mathbf{u} - \mathbf{v}_h\|_1 + \inf_{q_h \in R_h} \|p - q_h\|_{0,\Omega_1} + \sup_{\mathbf{v}_h \in \mathbf{V}_h \setminus \{0\}} \frac{|\tilde{a}(\mathbf{u}, \mathbf{v}_h) + \tilde{b}(\mathbf{v}_h, p) - l(\mathbf{v}_h)|}{\|\mathbf{v}_h\|_1} \right).$$

We note that the first two terms in the right hand side of (11) denote the best approximation error and the last one is the consistency error.

**Lemma 10.** *The following identity holds for the consistency error in Lemma 9*

$$\sup_{\mathbf{v}_h \in \mathbf{V}_h \setminus \{0\}} \frac{|\tilde{a}(\mathbf{u}, \mathbf{v}_h) + \tilde{b}(\mathbf{v}_h, p) - l(\mathbf{v}_h)|}{\|\mathbf{v}_h\|_1} = \sup_{\mathbf{v}_h \in \mathbf{V}_h \setminus \{0\}} \frac{|\int_{\Gamma} \mathcal{C}_2 \boldsymbol{\varepsilon}(\mathbf{u}_2) \mathbf{n} \cdot [\mathbf{v}_h] d\boldsymbol{\sigma}|}{\|\mathbf{v}_h\|_1},$$

where the integral  $\int_{\Gamma} \mathcal{C}_2 \boldsymbol{\varepsilon}(\mathbf{u}_2) \mathbf{n} \cdot [\mathbf{v}_h] d\boldsymbol{\sigma}$  is to be understood as a duality pairing between  $\mathbf{H}^{-\frac{1}{2}}(\Gamma)$  and  $\mathbf{H}^{\frac{1}{2}}(\Gamma)$ .



*Proof.*

$$\begin{aligned}
 \tilde{a}(\mathbf{u}, \mathbf{v}_h) + \tilde{b}(\mathbf{v}_h, p) - l(\mathbf{v}_h) &= \sum_{k=1}^2 \int_{\Omega_k} \mathcal{C}_k \boldsymbol{\varepsilon}(\mathbf{u}) : \boldsymbol{\varepsilon}(\mathbf{v}_h) dx \\
 &+ \int_{\Omega_1} (p - \lambda_1 \nabla \cdot \mathbf{u}) \nabla \cdot \mathbf{v}_h dx - l(\mathbf{v}_h) \\
 &= \int_{\Gamma} \mathcal{C}_2 \boldsymbol{\varepsilon}(\mathbf{u}_2) \mathbf{n} \cdot [\mathbf{v}_h] d\boldsymbol{\sigma},
 \end{aligned}$$

where in the last step we have used the second equation of (2), and  $\mathbf{u} \in \mathbf{H}_0^1(\Omega)$ .  $\square$

The a priori error estimate is obtained by combining the approximation of the saddle point problem in our nonconforming situation with the best approximation property of  $\mathbf{V}_h$ ,  $R_h$  and  $\mathbf{M}_h$ .

**Theorem 11.** *Assume that  $\mathbf{u} \in \Pi_{k=1}^2 \mathbf{H}^{r_k+1}(\Omega_k)$ ,  $p \in H^{r_1}(\Omega_1)$ , and  $\boldsymbol{\chi} := \mathcal{C}_2 \boldsymbol{\varepsilon}(\mathbf{u}_2) \mathbf{n} \in \Pi_{i=1}^N \mathbf{H}^{r_2-\frac{1}{2}}(\gamma_i)$  with  $r_k > \frac{1}{2}$ ,  $k = 1, 2$ . Moreover, assume that*

$$\inf_{q_h \in R_h} \|q - q_h\|_{0, \Omega_1} \leq Ch_1^{p_1} \|q\|_{p_1, \Omega_1}, \quad q \in H^{p_1}(\Omega_1).$$

*Then the following a priori error estimate holds for the discretization error*

$$\|\mathbf{u} - \mathbf{u}_h\|_1 + \|p - p_h\|_{0, \Omega_1} \leq C \left( \sum_{k=1}^2 h_k^{t_k} \|\mathbf{u}\|_{t_k+1, \Omega_k} + h_1^{t_1} \|p\|_{t_1, \Omega_1} \right),$$

where  $t_k := \min(r_k, p_k)$ ,  $k = 1, 2$ .

*Proof.* The best approximation property of  $\mathbf{V}_h$  is quite standard and can be found, e.g., in [8, 9]. Hence using Lemma 9 it is sufficient to consider the consistency error. The definition of space  $\mathbf{V}_h$ , the best approximation property of  $\mathbf{M}_h$  and the trace theorem yield for  $\boldsymbol{\psi}_h \in \mathbf{M}_h$

$$\begin{aligned}
 \int_{\Gamma} \boldsymbol{\chi} \cdot [\mathbf{v}_h] d\boldsymbol{\sigma} &= \int_{\Gamma} (\mathcal{C}_2 \boldsymbol{\varepsilon}(\mathbf{u}_2) \mathbf{n} - \boldsymbol{\psi}_h) \cdot [\mathbf{v}_h] d\boldsymbol{\sigma} \\
 &\leq \sum_{i=1}^N \inf_{\boldsymbol{\psi}_h \in \mathbf{M}_i} \|\mathcal{C}_2 \boldsymbol{\varepsilon}(\mathbf{u}_2) \mathbf{n} - \boldsymbol{\psi}_h\|_{(\mathbf{H}^{1/2}(\gamma_i))'} \|[\mathbf{v}_h]\|_{1/2, \gamma_i} \\
 &\leq Ch_2^{t_2} \sum_{i=1}^N \|\mathcal{C}_2 \boldsymbol{\varepsilon}(\mathbf{u}_2) \mathbf{n}\|_{t_2-1/2, \gamma_i} \|\mathbf{v}_h\|_1 \\
 &\leq Ch_2^{t_2} \|\mathbf{u}\|_{t_2+1, \Omega_2} \|\mathbf{v}_h\|_1.
 \end{aligned}$$

$\square$

The assumption of Theorem 11 requires a strong assumption on the regularity of the solution  $\mathbf{u} \in \Pi_{k=1}^2 \mathbf{H}^{r_k+1}(\Omega_k)$  with  $r_k > \frac{1}{2}$ ,  $k = 1, 2$ . In the following, invoking a result about the regularity of the co-normal derivative on Lipschitz domain [19], we prove an optimal estimate under a weaker regularity assumption such that  $0 < r_k < \frac{1}{2}$ . We note that we have to exclude the case  $r_k = \frac{1}{2}$  as the result in [19] does not cover this case.

**Theorem 12.** *Assume that  $\mathbf{u} \in \prod_{k=1}^2 \mathbf{H}^{r_k+1}(\Omega_k)$ ,  $p \in H^{r_1}(\Omega_1)$  with  $0 < r_k < \frac{1}{2}$ ,  $k = 1, 2$ . If*

$$\inf_{q_h \in R_h} \|q - q_h\|_{0,\Omega_1} \leq Ch_1^{r_1} \|q\|_{r_1,\Omega_1}, \quad q \in H^{r_1}(\Omega_1),$$

*the following a priori error estimate holds for the discretization error*

$$\|\mathbf{u} - \mathbf{u}_h\|_1 + \|p - p_h\|_{0,\Omega_1} \leq C \left( \sum_{k=1}^2 h_k^{r_k} \|\mathbf{u}\|_{r_k+1,\Omega_k} + h_1^{r_1} \|p\|_{r_1,\Omega_1} + h_2^{r_2} \|\mathbf{f}_2\|_{0,\Omega_2} \right).$$

*Proof.* As  $\mathbf{f}_2 \in (L^2(\Omega_2))^d$  and  $\mathbf{u}|_{\Omega_2} \in \mathbf{H}^{r_2}(\Omega_2)$ , Lemma 4.3 of [19] yields  $\boldsymbol{\chi}|_{\Gamma} \in \mathbf{H}^{r_2-\frac{1}{2}}(\Gamma)$  with

$$\|\boldsymbol{\chi}\|_{r_2-\frac{1}{2},\Gamma} \leq C (\|\mathbf{u}\|_{1+r_2,\Omega_2} + \|\mathbf{f}_2\|_{0,\Omega_2}).$$

Let  $\boldsymbol{\psi}_h \in \mathbf{M}_h$ . Proceeding exactly as in Theorem 11 and using the previous result, we obtain

$$\begin{aligned} \int_{\Gamma} \boldsymbol{\chi} \cdot [\mathbf{v}_h] d\boldsymbol{\sigma} &\leq Ch_2^{r_2} \sum_{i=1}^N \|\mathcal{C}_2 \boldsymbol{\varepsilon}(\mathbf{u}_2) \mathbf{n}\|_{r_2-1/2,\gamma_i} \|\mathbf{v}_h\|_1 \\ &\leq Ch_2^{r_2} (\|\mathbf{u}\|_{1+r_2,\Omega_2} + \|\mathbf{f}_2\|_{0,\Omega_2}) \|\mathbf{v}_h\|_1. \end{aligned}$$

We note that the integral  $\int_{\Gamma} \boldsymbol{\chi} \cdot [\mathbf{v}_h] d\boldsymbol{\sigma}$  is to be understood as a duality pairing between  $\mathbf{H}^{r_2-\frac{1}{2}}(\Gamma)$  and  $\mathbf{H}^{\frac{1}{2}-r_2}(\Gamma)$ .  $\square$

Here we have assumed  $\mathbf{f}_2 \in (L^2(\Omega_2))^d$  to use the result of [19]. For a loading function  $\mathbf{f}_2$  with low regularity and for the case with some  $r_k = \frac{1}{2}$ , results similar to those of [19] are obtained in [25].

**Remark 13.** *If  $\Omega_1$  is on the slave side of the interface  $\Gamma$ , then we have to estimate the term*

$$\sum_{i=1}^N \inf_{\boldsymbol{\psi}_h \in \mathbf{M}_i} \|\mathcal{C}_1 \boldsymbol{\varepsilon}(\mathbf{u}_1) \mathbf{n} - \boldsymbol{\psi}_h\|_{(\mathbf{H}^{1/2}(\gamma_i))'},$$

*where now the Lagrange multiplier spaces  $\mathbf{M}_i$  are defined on  $\gamma_i$ ,  $1 \leq i \leq N$ , with the mesh inherited from  $\mathcal{T}_1$ . In this case, assuming  $r_2, r_1 > \frac{1}{2}$ , we can use the second equation of (2) to obtain*

$$\begin{aligned} \int_{\Gamma} \boldsymbol{\chi} \cdot [\mathbf{v}_h] d\boldsymbol{\sigma} &\leq \sum_{i=1}^N \inf_{\boldsymbol{\psi}_h \in \mathbf{M}_i} \|\mathcal{C}_1 \boldsymbol{\varepsilon}(\mathbf{u}_1) \mathbf{n} - \boldsymbol{\psi}_h\|_{(\mathbf{H}^{1/2}(\gamma_i))'} \|\mathbf{v}_h\|_{1/2,\gamma_i} \\ &= \sum_{i=1}^N \inf_{\boldsymbol{\psi}_h \in \mathbf{M}_i} \|\mathcal{C}_2 \boldsymbol{\varepsilon}(\mathbf{u}_2) \mathbf{n} - \boldsymbol{\psi}_h\|_{(\mathbf{H}^{1/2}(\gamma_i))'} \|\mathbf{v}_h\|_{1/2,\gamma_i} \\ &\leq Ch_1^{t_1} \sum_{i=1}^N \|\mathcal{C}_2 \boldsymbol{\varepsilon}(\mathbf{u}_2) \mathbf{n}\|_{t_1-1/2,\gamma_i} \|\mathbf{v}_h\|_1 \\ &\leq Ch_1^{t_1} \|\mathbf{u}\|_{t_1+1,\Omega_2} \|\mathbf{v}_h\|_1. \end{aligned}$$

#### 4. Numerical results

In this section, we investigate the computational performance of our approach through some numerical examples. In particular, we compare the results from the standard approach and mortar approach for different test examples. In the following,  $Q_1$  or  $Q_2$  denotes that standard bilinear or quadratic serendipity elements are used in the whole domain  $\Omega$ , whereas  $Q_1$ - $Q_1P_0$ ,  $Q_2$ - $Q_2P_0$  or  $Q_2$ - $Q_2P_1$  denotes that  $Q_1P_0$ ,  $Q_2P_0$  or  $Q_2P_1$  formulation is used in subdomains with a nearly incompressible material ( $\nu \rightarrow 0.5$ ) in combination with the standard  $Q_1$  or  $Q_2$  formulation in subdomains with smaller  $\nu$ . We note that the mathematical theory presented in the previous sections do not cover the case of  $Q_1P_0$  discretizations as these discretizations do not satisfy a local inf-sup condition.

In all our examples, we work with non-matching triangulations and employ dual Lagrange multiplier spaces introduced in [34] to realize the weak matching condition. Construction of dual Lagrange multiplier spaces for higher order finite elements can be found in [28]. For the pressure space, piecewise constant pressure is used for  $Q_1P_0$  and  $Q_2P_0$ , whereas discontinuous linear pressure is used for  $Q_2P_1$  case. Furthermore, we do not specify the measurement units, and they should be understood with proper scaling.

**Example 1: Cook’s membrane problem.** In this example, we consider a structure occupying a region  $\Omega := \text{conv}\{(0, 0), (48, 44), (48, 60), (0, 44)\}$ , where  $\text{conv}\xi$  is the convex hull of the set  $\xi$ . The left boundary of  $\Omega$  is fixed and an in-plane shearing load of 100N is applied along the positive  $y$ -direction on the right boundary. Here, the domain  $\Omega$  is decomposed into two subdomains  $\Omega_1$  and  $\Omega_2$  with

$$\Omega_2 := \text{conv}\{(12, 20.25), (36, 38.75), (36, 50.25), (12, 38.75)\},$$

and  $\Omega_1 := \Omega \setminus \bar{\Omega}_2$ . The decomposition of domain  $\Omega$  and the initial triangulation are given in Figure 1. The material parameters are taken to be  $E_1 = 250$ ,  $E_2 = 80$ ,

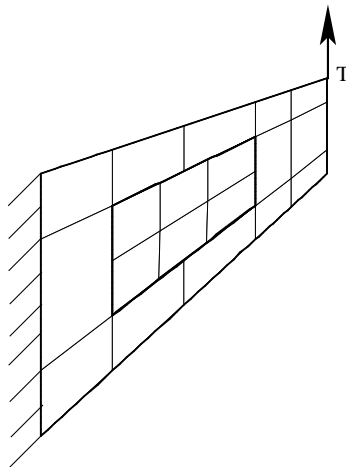


Figure 1: Cook’s membrane decomposed into two subdomains

$\nu_1 = 0.49999$ , and  $\nu_2 = 0.35$  to get a nearly incompressible response in  $\Omega_1$ . We

recall that Lamé parameters  $\lambda$  and  $\mu$  are related to Young's modulus  $E$  and Poisson ratio  $\nu$  by

$$\lambda = \frac{E\nu}{(1+\nu)(1-2\nu)}, \quad \text{and} \quad \mu = \frac{E}{2(1+\nu)},$$

and note that  $\lambda \rightarrow \infty$  corresponds to  $\nu \rightarrow 0.5$ . In Figure 2, we have shown the absolute error in the vertical tip displacement of the membrane at point  $T$ . We have used a reference solution in a fine mesh computed by using  $Q_2P_1$  formulation in the whole domain  $\Omega$  to obtain the error. We see that uniform convergence is obtained if we work with  $Q_1-Q_1P_0$ ,  $Q_2-Q_2P_0$ ,  $Q_2-Q_2P_1$  or  $Q_2$ , see Figure 2. In this problem, we see that  $Q_1-Q_1P_0$  and  $Q_2$  elements work as good as  $Q_2-Q_2P_0$  and  $Q_2-Q_2P_1$ . To show the influence of the choice of the master and the slave side, we have given the plot of the absolute error in the vertical tip displacement at the top right corner of the membrane in the left and right pictures of Figure 2 for different choices of master and slave sides. Comparing both of these pictures, we can see that there is not any essential difference between choosing  $\Omega_1$  or  $\Omega_2$  as the slave side. However, since the Lagrange multiplier space  $\mathbf{M}_h$  is based on a coarser mesh if  $\Omega_2$  is on the slave side, we see some influence in the first step.

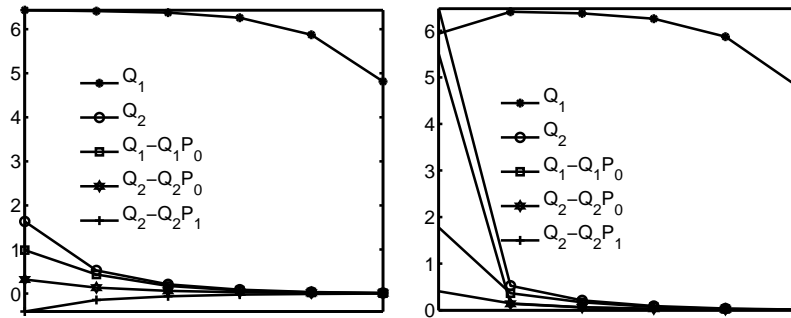


Figure 2: Absolute error in the vertical tip displacement at the top right corner versus number of elements ( $\Omega_1$  master,  $\Omega_2$  slave) (left) and ( $\Omega_2$  master,  $\Omega_1$  slave) (right),  $\Omega_1$  nearly incompressible, Example 1

In a next step, we investigate the situation with the nearly incompressible material in  $\Omega_2$  so that the material parameters are  $E_1 = 80$ ,  $E_2 = 250$ ,  $\nu_1 = 0.35$ , and  $\nu_2 = 0.49999$ . As before we also want to see the influence of the choice of the master and the slave side. The vertical tip displacement at the top right corner of the membrane for different levels of refinement are shown in the left and the right pictures of Figure 3 for different choices of master and slave sides. The standard approach in both subdomains leads to locking, whereas we obtain a good convergence behavior if a mixed formulation is used in  $\Omega_2$ . As before, we do not see any influence of the choice of the master and slave side when we refine the mesh.

**Example 2: Comparison of errors in the  $L^2$ - and  $H^1$ -norms.** In this example, a two-dimensional region  $\Omega := (-1, 1) \times (-1, 1)$  is decomposed into four non-overlapping subdomains defined by  $\Omega_1 := (-1, 0) \times (-1, 0)$ ,  $\Omega_2 := (0, 1) \times (-1, 0)$ ,  $\Omega_3 := (-1, 0) \times (0, 1)$  and  $\Omega_4 := (0, 1) \times (0, 1)$ . The problem for this example is taken from [15] with a slight modification to enforce that the jump of the flux across

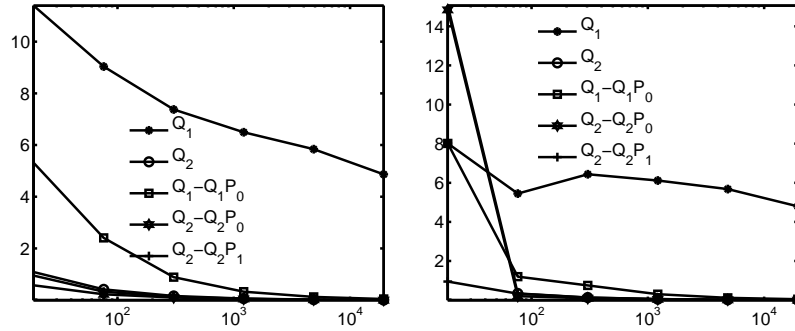


Figure 3: Absolute error in the vertical tip displacement at the top right corner versus number of elements ( $\Omega_1$  master,  $\Omega_2$  slave) (left), and ( $\Omega_2$  master,  $\Omega_1$  slave) (right), Example 1,  $\Omega_2$  nearly incompressible

the interface  $\Gamma$  is zero. Here, the exact solution  $\mathbf{u} = (u_1, u_2)$  is

$$\begin{aligned}
 u_1(x, y) &:= \frac{\sin(2\pi y)(-1 + \cos(2\pi x))(2 + 2\nu)}{E} \\
 &\quad + xy \sin(\pi x) \sin(\pi y) \frac{(1 + \nu)(1 - 2\nu)}{1 - \nu - 2\nu^2 + E\nu}, \\
 u_2(x, y) &:= \frac{\sin(2\pi x)(1 - \cos(2\pi y))(2 + 2\nu)}{E} \\
 &\quad + xy \sin(\pi x) \sin(\pi y) \frac{(1 + \nu)(1 - 2\nu)}{1 - \nu - 2\nu^2 + E\nu},
 \end{aligned}$$

where  $\nu = 0.3, E = 25$  in  $\Omega_1$  and  $\Omega_4$ , and  $\nu = 0.49999, E = 250$  in  $\Omega_2$  and  $\Omega_3$  so that a nearly incompressible response is obtained in  $\Omega_2$  and  $\Omega_3$ . In this example, the right hand side and the Dirichlet boundary conditions are computed by using the exact solution. We have given the decomposition of the domain and the initial triangulation in the left picture of Figure 4, and the error plot versus number of degrees of freedom for different levels of refinement for the  $L^2$  and  $H^1$ -norms are given in the middle and the right pictures, respectively. From Figure 4, we can see that the optimality can be obtained by using  $Q_1P_0$  and  $Q_2P_1$ -approaches for the nearly incompressible material, whereas the standard  $Q_1$ -approach locks. Furthermore, we can observe the sub-optimal behavior for  $Q_2P_0$  and  $Q_2$ -discretizations.

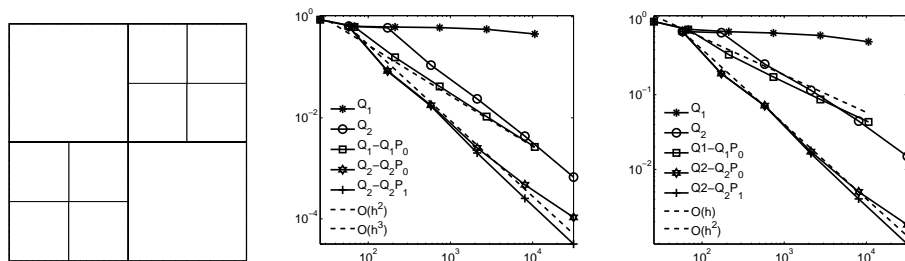


Figure 4: Decomposition of the domain and initial triangulation (left), error plot versus number degrees of freedom in  $L^2$ -norm (middle) and error plot versus number of degrees of freedom in  $H^1$ -norm (right), Example 2

**Example 3: Three-dimensional I-beam.** In this numerical test, we consider the coupling of compressible and nearly incompressible elasticity in three-dimensional elasticity. The computational domain  $\Omega$ , which is an I-beam, is decomposed into three subdomains  $\Omega_1$ ,  $\Omega_2$  and  $\Omega_3$  with  $\Omega_1 := (0, 50) \times (0, 10) \times (0, 2)$ ,  $\Omega_2 := (0, 50) \times (3, 7) \times (2, 11)$  and  $\Omega_3 := (0, 50) \times (0, 10) \times (11, 13)$ . We impose zero Dirichlet boundary condition on  $\Gamma_D$ , where  $\Gamma_D$  is a part of the boundary of  $\Omega$  with  $x = 0$  and  $x = 50$  so that the left and the right sides of each subdomain are fixed. And a constant vertical force is applied on a small part of the top boundary ( $z = 13$ ) so that  $\sigma(\mathbf{u})\mathbf{n} = \mathbf{g}_N$  on  $\Gamma_N$  with  $\Gamma_N := \partial\Omega \setminus \Gamma_D$ . The function  $\mathbf{g}_N = (g_1, g_2, g_3)$  on  $\Gamma_N$  is given as  $g_1 = g_2 = 0$ , and

$$g_3 = \begin{cases} -20.35 & \text{if } 22 \leq x \leq 28 \text{ and } z = 13 \\ 0 & \text{otherwise} \end{cases}.$$

The material parameters are  $E_1 = 250$ ,  $\nu_1 = 0.3$ ,  $E_2 = 300$ ,  $\nu_2 = 0.4$ , and  $E_3 = 350$ ,  $\nu_3 = 0.49999$ . We have shown the setting of the problem in the left picture of Figure 5, and the resulting deformation of the structure is shown in the right.

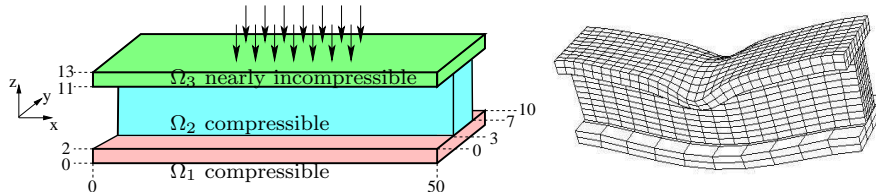


Figure 5: Left: I-beam decomposed into three subdomains, Right: the distorted mesh

In Figure 6, we have shown the error in the vertical displacement along the line  $y = 0, z = 13$  versus  $x$ -coordinates. The error is obtained by using a reference solution computed in a fine mesh with  $Q_2P_1$  formulation in the whole domain  $\Omega$ . As can be seen from this figure, the standard approaches show performance worse than a coupled approach due to the locking effect. In the case of coupled approach, the mixed formulation is used only in subdomain  $\Omega_3$ . The vertical displacements from  $Q_2$ ,  $Q_2$ - $Q_2P_1$  and  $Q_2$ - $Q_2P_0$ -approaches are computed by using a one-level coarser mesh than those from  $Q_1$ -approach. We can see that numerical solutions from the coupled approach with  $Q_2P_0$  and  $Q_2P_1$  discretizations are almost the same.

### Acknowledgement

I am grateful to Prof. Barbara Wohlmuth, IANS, University of Stuttgart, Germany, for her support during the preparation of this work. I also thank the anonymous referees for their suggestions to improve an earlier version of this work.

### References

- [1] D. Arnold, F. Brezzi, and J. Douglas, Jr. PEERS: A new mixed finite element for plane elasticity. *Japan J. Appl. Math.*, 1:347–367, 1984.

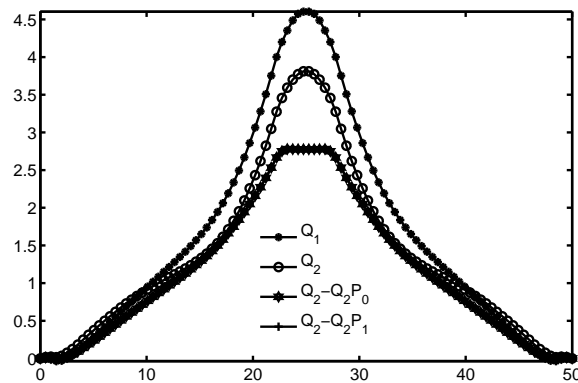


Figure 6: Absolute error in the vertical displacement on the line  $y = 0, z = 13$  versus  $x$ -coordinates

- [2] D.N. Arnold, L.R. Scott, and M. Vogelius. Regular inversion of the divergence operator with dirichlet boundary conditions on a polygon. *Annali Scuola Norm. Sup. Pisa, Serie 4*, 15:169–192, 1988.
- [3] D.N. Arnold and R. Winther. Mixed finite elements for elasticity. *Numerische Mathematik*, 92:401–419, 2002.
- [4] I. Babuška and M. Suri. Locking effects in the finite element approximation of elasticity problems. *Numerische Mathematik*, 62:439–463, 1992.
- [5] F. B. Belgacem, L. K. Chilton, and P. Seshaiyer. Non-conforming computational methods for mixed elasticity problems. *Computational Methods in Applied Mathematics*, 3:23–34, 2003.
- [6] F. Ben Belgacem. The mixed mortar finite element method for the incompressible Stokes problem: Convergence analysis. *SIAM Journal on Numerical Analysis*, 37:1085–1100, 2000.
- [7] F. Ben Belgacem. A stabilized domain decomposition method with nonmatching grids for the Stokes problem in three dimensions. *SIAM Journal on Numerical Analysis*, 42:667–685, 2004.
- [8] C. Bernardi, Y. Maday, and A.T. Patera. Domain decomposition by the mortar element method. In H.G. Kaper & M. Garbey, editor, *Asymptotic and numerical methods for partial differential equations with critical parameters*, pages 269–286, 1993.
- [9] C. Bernardi, Y. Maday, and A.T. Patera. A new nonconforming approach to domain decomposition: the mortar element method. In H. Brezis & J.-L. Lions, editor, *Nonlinear partial differential equations and their applications*, pages 13–51. Paris, 1994.
- [10] J.M. Boland and R.A. Nicolaides. Stability of finite elements under divergence constraints. *SIAM Journal on Numerical Analysis*, 20:723–731, 1983.
- [11] D. Braess. Stability of saddle point problems with penalty. *Mathematical Modelling and Numerical Analysis*, 30:731–742, 1996.
- [12] D. Braess. Enhanced assumed strain elements and locking in membrane problems. *Computer Methods in Applied Mechanics and Engineering*, 165:155–174, 1998.
- [13] D. Braess. *Finite Elements. Theory, fast solver, and applications in solid mechanics*. Cambridge Univ. Press, Second Edition, 2001.
- [14] D. Braess, C. Carstensen, and B.D. Reddy. Uniform convergence and a posteriori error estimators for the enhanced strain finite element method. *Numerische Mathematik*, 96:461–479, 2004.
- [15] S.C. Brenner. A nonconforming mixed multigrid method for the pure displacement problem in planar linear elasticity. *SIAM Journal on Numerical Analysis*, 30:116–135, 1993.
- [16] S.C. Brenner. Korn’s inequalities for piecewise  $H^1$  vector fields. *Mathematics of Computation*, 73:1067–1087, 2004.
- [17] S.C. Brenner and L. Sung. Linear finite element methods for planar linear elasticity. *Mathematics of Computation*, 59:321–338, 1992.
- [18] F. Brezzi and M. Fortin. *Mixed and hybrid finite element methods*. Springer-Verlag, New York, 1991.
- [19] M. Costabel. Boundary integral equations on Lipschitz domains: Elementary results. *SIAM Journal on Mathematical Analysis*, 19:613–626, 1988.

- [20] N. Débit and Y. Maday. The coupling of spectral and finite element methods for the approximation of the Stokes problem. In *Proceedings of the 8th Joint France-Italy-USSR Symposium of Computational Mathematics and Applications*, pages 139–163, Pavia, 1987.
- [21] R.S. Falk. Nonconforming finite element methods for the equations of linear elasticity. *Mathematics of Computation*, 57:529–550, 1991.
- [22] G.P. Galdi. *An Introduction to the Mathematical Theory of the Navier-Stokes Equations, Volume I*, volume 38 of *Springer Tracts in Natural Philosophy*. Springer, first revised edition, 1997.
- [23] V. Girault and P.-A. Raviart. *Finite Element Methods for Navier-Stokes Equations*. Springer-Verlag, Berlin, 1986.
- [24] P. Hauret and P. Le Tallec. Stabilized discontinuous mortar formulation for elastostatics and elastodynamics problems - Part I: formulation and analysis. *CMAP Internal Report 553*, 2004.
- [25] Q. Hu. Generalized normal derivatives and their applications in DDMS with nonmatching grids and DG method. *Numerical Mathematics: Theory, Methods and Applications*, 1:383–409, 2008.
- [26] E.P. Kasper and R.L. Taylor. A mixed-enhanced strain method. Part I: geometrically linear problems. *Computers and Structures*, 75:237–250, 2000.
- [27] E.P. Kasper and R.L. Taylor. A mixed-enhanced strain method. Part II: geometrically nonlinear problems. *Computers and Structures*, 75:251–260, 2000.
- [28] B.P. Lamichhane. *Higher Order Mortar Finite Elements with Dual Lagrange Multiplier Spaces and Applications*. PhD thesis, University of Stuttgart, 2006.
- [29] B.P. Lamichhane, B.D. Reddy, and B.I. Wohlmuth. Convergence in the incompressible limit of finite element approximations based on the Hu-Washizu formulation. *Numerische Mathematik*, 104:151–175, 2006.
- [30] C.-O. Lee, J. Lee, and D. Sheen. A locking-free nonconforming finite element method for planar linear elasticity. *Advances in Computational Mathematics*, 19:277–291, 2003.
- [31] L.R. Scott and M. Vogelius. Norm estimates for a maximal right inverse of the divergence operator in spaces of piecewise polynomials. *Mathematical Modelling and Numerical Analysis*, 19:111–143, 1985.
- [32] J.C. Simo and M.S. Rifai. A class of assumed strain method and the methods of incompatible modes. *International Journal for Numerical Methods in Engineering*, 29:1595–1638, 1990.
- [33] C. Wiens. Robust multigrid methods for nearly incompressible linear elasticity. *Computing*, 64:289–306, 2000.
- [34] B.I. Wohlmuth. *Discretization Methods and Iterative Solvers Based on Domain Decomposition*, volume 17 of *LNCIS*. Springer Heidelberg, 2001.

Centre for Mathematics and its Applications, Mathematical Sciences Institute, Australian National University, ACT 0200, Canberra

*E-mail*: [Bishnu.Lamichhane@maths.anu.edu.au](mailto:Bishnu.Lamichhane@maths.anu.edu.au)